

PRODUCT DATSHEET: CAT6 23AWG UTP, ECCS ARMOURED INNER JACKET PVC - OUTER JACKET FR-LSZH UV PROTECTED

1. Physical Structure/Properties:

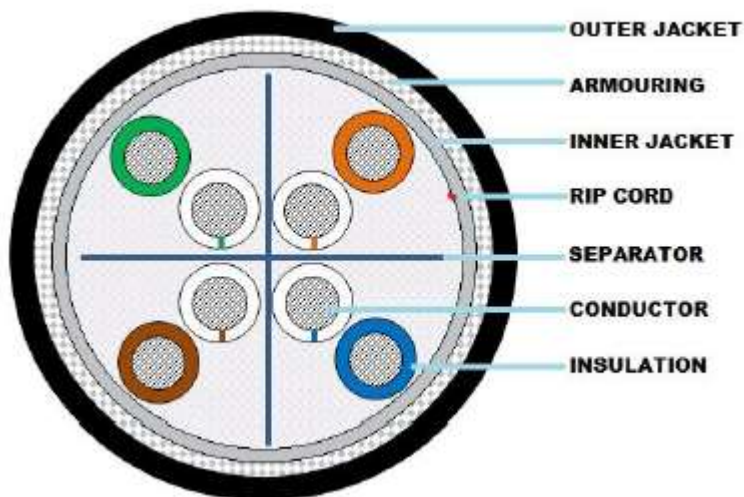


Fig. 1.1

Table 1.1 Construction details:

Parameter	Dimension
Conductor	Solid Bare Electrolytic Grade Copper
Nominal Conductor Diameter	23 AWG (0.550 ± 0.015 mm)
Insulation	HDPE
Pairing	Twisted into Two core
No. of pairing	4, Each pair twisted
Colour code	
Pair #1	Orange-white with Orange
Pair #2	Brown-White with Brown
Pair #3	Blue-White with Blue
Pair #4	Green-White with Green
Inner Jacket	PVC
Armouring	ECCS Armour
Outer Jacket:	FR-LSZH Black (UV Protected)
Approximate OD	11.0 +/- 0.50mm
Rip Cord	Yes
Sequential Marking	At Every meter
Cross Filler	HDPE

2) Temperature Rating:

Parameter	Dimension
Installation Temperature	0 to +50 deg C
Storage Temperature	-20 to +75 deg C
Operating Temperature	-20 to +60 deg C

- For additional information please contact your sales representative
- CISFIBER Infra Solutions Pvt. Ltd. reserves the right to make changes in this datasheet at any time without notice

PRODUCT DATSHEET: CAT6 23AWG UTP, ECCS ARMoured INNER JACKET PVC - OUTER JACKET FR-LSZH UV PROTECTED

3) Electrical characteristics:

Table 3.1 Electrical characteristics

Parameter	Dimension
DC resistance	93.5Ω/1000 mtr @20°c Max
DC resistance Unbalance	5% Max
Mutual Capacitance	5.6 nF/100 mtr Max
NVP	69%
Impedance	100±15Ω
Worst Cable Skew	45ns/100m

Table 3.2 Transmission Characteristics meets or exceed ANSI/TIA-568-C.2

Freq. MHz	ATT Max. dB	NEXT Min. dB	PSNEXT Min. dB	ACRF Min. dB	PSACRF Min. dB	RL Min. dB
1	2.1	65.0	62.0	63.3	60.3	19
4	4.0	63.0	60.5	51.2	48.2	19
8	5.7	58.2	55.6	45.2	42.2	19
10	6.3	56.6	54.0	43.3	40.3	19
16	8.0	53.2	50.6	39.2	36.2	18
20	9.0	51.6	49.0	37.2	34.2	17.5
25	10.1	50.0	47.3	35.3	32.3	17.0
31.25	11.4	48.4	45.7	33.4	30.4	16.5
62.5	16.5	43.4	40.6	27.3	24.3	14.0
100	21.3	39.9	37.1	23.3	20.3	12.0
200	31.5	34.8	31.9	17.2	14.2	9.0
250	35.9	33.1	30.2	15.3	12.3	8.0

4. Packaging and Cable Printing details:

CISNET Cat6 23AWG UTP, ECCS Armoured Inner Jacket PVC-Outer Jacket FR-LSZH UV <cable PN> RoHS COMPLIANT <month/year> <batch number> XXX m

CISNET Cable PN	Description	Packaging Length
CA-00353-002	CISNET Cat6 23AWG UTP, ECCS Armoured Inner Jacket PVC-Outer Jacket FR-LSZH UV Protected	305m

5. Standards

- Compliant to TIA/EIA-568C.2 standards
- RoHs

• For additional information please contact your sales representative
 • CISFIBER Infra Solutions Pvt. Ltd. reserves the right to make changes in this datasheet at any time without notice